


# GIPS BAND

Single-sided nail point sealant tape for profiles

Support film and closed-cell polyethylene (PP) foam profile with acrylic glue

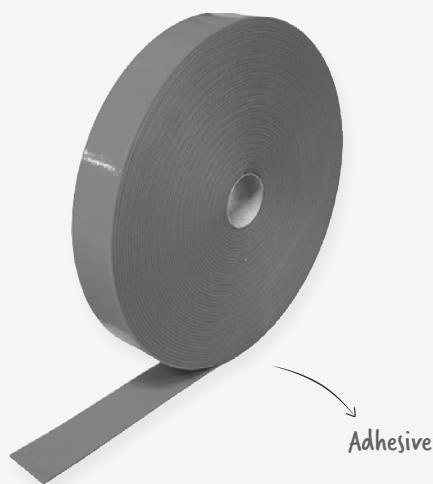


## INTUITIVE

Easy to apply adhesive profile, also using LIZARD unwinder



## ACOUSTIC INSULATION

Anti vibration for ribbing on the counterwall structure



## CODES AND DIMENSIONS

| code              | ex code | s [mm] | B [mm] | L [m] | pcs/box |
|-------------------|---------|--------|--------|-------|---------|
| <b>GIPSBAND50</b> | D67464  | 3      | 50     | 30    | 10      |

## TECHNICAL SPECIFICATIONS

| property               | standard            | value                        |
|------------------------|---------------------|------------------------------|
| Temperature resistance | -                   | -30 / +80 °C                 |
| Specific weight        | ISO 845             | approx. 25 kg/m <sup>3</sup> |
| Tear strength MD/CD    | ISO 1926            | 325 / 220 kPa                |
| Elongation MD/CD       | ISO 1926            | 125 / 115 %                  |
| Compression strength   | ISO 3386/1          | 2 kPa at 10 % compression    |
|                        | ISO 3386/1          | 3 kPa at 25 % compression    |
|                        | ISO 3386/1          | 5 kPa at 50 % compression    |
| Reaction to fire       | DIN 4102 / EN 13501 | class B2 / E                 |
| Water absorbancy       | ISO 2896            | < 2 % vol.                   |
| Thermal conductivity   | -                   | 0.04 W/mK (a +10 °C)         |
| Storage temperature    | -                   | +5 / +25 °C                  |
| Solvents               | -                   | NO                           |
| VOC emissions          | -                   | < 0.02 % (class A+)          |

NOTE: Store the product in a dry, covered location