

SILENT FLOOR PE

TECHNICAL MANUAL



Solutions for Building Technology

CONTENTS

ACOUSTIC PROBLEMS OF FLOORS..... 4

SILENT FLOOR PE 6

SILFLOORPE6 8

LABORATORY MEASUREMENT | CLT FLOOR 1..... 9

LABORATORY MEASUREMENT | CLT FLOOR 1..... 10

SILFLOORPE10 11

ACOUSTIC PROBLEMS OF FLOORS



WHAT IS IMPACT NOISE?

When it comes to floors, impact noise is the main acoustic problem because it constantly affects them. When a body impacts on the floor structure, the noise quickly spreads throughout the building either by air, affecting the nearest rooms, or by structure, propagating into the most distant rooms.

WHAT IS AIRBORNE NOISE?

Airborne noise is generated in the air and, after an initial airborne phase, is transported both by air and by structure. This is a problem that affects both walls and floors, but if we are talking about floors, the most important problem is certainly impact noise.

HERE IS THE SOLUTION

In order to be able to minimise the discomfort caused by impact noise, a stratigraphic package should be designed consisting of layers of different materials that are disconnected from each other and are able to dissipate the energy transmitted by the impact.



MASS-SPRING-MASS SYSTEM


A floating screed system such as the one shown in the images below can be schematised with a mass-spring-mass system, in which the structural floor represents the mass, the impact-absorbing product is equivalent to the spring, and the upper screed with the floor constitutes the second mass of the system. In this context, "resilient layer" is defined as the element with the spring function characterised by its own *dynamic stiffness s'*.



HOW IS THE IMPACT NOISE LEVEL MEASURED?


The impact noise level is a measure of the disturbance perceived in a room when an impact noise source is activated in the upper room. It can be measured both on site and in the laboratory. Clearly, ideal conditions exist in the laboratory for the effects of lateral transmission to be neglected, as the laboratory itself is constructed so that the walls are decoupled from the ceiling.

TAPPING MACHINE method



The TAPPING MACHINE is used to simulate "light" and "hard" impacts, such as walking with heeled shoes or the impact caused by falling objects.

RUBBER BALL method



The RUBBER BALL is used to simulate "soft" and "heavy" impacts, such as a barefoot walk or a child jumping.


HOW TO CHOOSE THE BEST PRODUCT



DYNAMIC STIFFNESS – s'


Expressed in MN/m^3 , it is measured according to EN 29052-1 and expresses the deformation capacity of a material that is subjected to a dynamic stress. Consequently, it indicates the ability to dampen the vibrations generated by an impact noise.

The measurement method involves, first, measuring the *apparent dynamic stiffness* s'_t of the material and then correcting it, if necessary, to obtain the *real dynamic stiffness* s' . Dynamic stiffness depends in fact on the *flow resistivity* r , which is measured in the lateral direction of the sample. If the material has specific flow resistivity values, the apparent dynamic stiffness must be corrected by adding the contribution of the gas contained within the material: air.



VISCOUS SLIDING UNDER COMPRESSION – CREEP

Expressed as a percentage, it is measured according to EN 1606 and represents the long-term deformation of a material under constant load to be simulated. The measurement in the laboratory must be carried out over a period of at least 90 days.









COMPRESSIBILITY - c

The compressibility class expresses the behaviour of a material while subjected to screed loading. During measurement, the product is subjected to different loads and its thickness is measured. The compressibility measurement is carried out to understand what loads the underscreed product can withstand, in order to avoid cracking and splitting of screeds.

CORRECT INSTALLATION

The technological solution of the floating screed is one of the most widely used and one of the most effective, but in order to achieve satisfactory results it is important that the system is designed and implemented correctly.

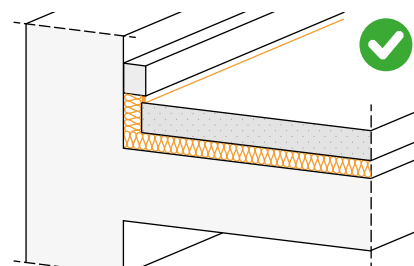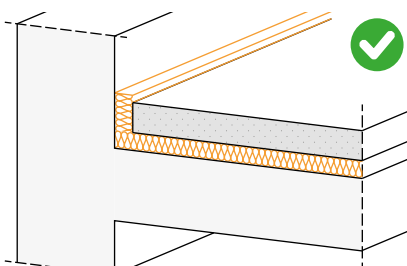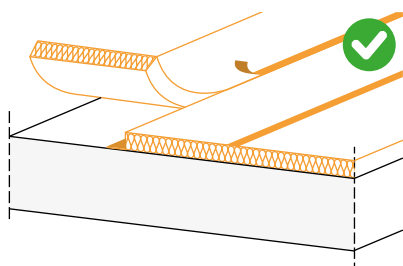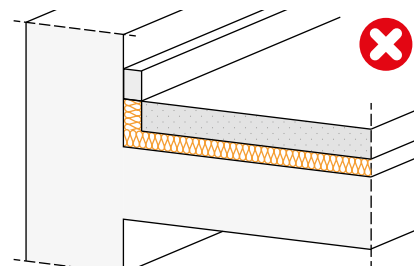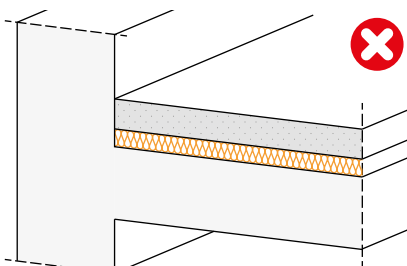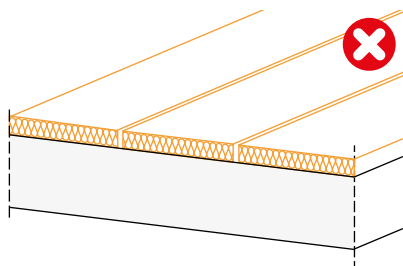

The resilient layer must be continuous because any gap would represent an acoustic bridge. When installing underscreed mats, care must be taken not to create discontinuities.

It is important to use the SILENT EDGE perimeter strip to ensure that the resilient layer is continuous around the entire perimeter of the room. The SILENT EDGE should only be trimmed after the floor has been installed and grouted.

The skirting board must be installed after the SILENT EDGE has been cut, ensuring that it is always suitably raised from the floor.

IIC vs L_w

IIC stands for **Impact Insulation Class** and is the value obtained by subtracting the noise level measured in the receiving room from the noise level measured in the source room. Impact Insulation Class, sometimes referred to as Impact Isolation Class, measures the resistance of the floor construction assembly against the propagation of impact-generated noise.

SILENT FLOOR PE

RESILIENT UNDERSCREED MEMBRANE MADE OF CLOSED CELL PE

CLOSED CELL

Thanks to the grid of closed cell polyethylene, the foil will not permanently deform and remains effective over time.

COST-PERFORMANCE

Composition of the mixture optimised to provide both good performance and low cost.

VERSATILE


This product is a versatile solution in any application where a light and flexible resilient product is required.

COMPOSITION

closed cell expanded polyethylene



CODES AND DIMENSIONS

CODE	H [m]	L [m]	thickness [mm]	A [m ²]	
SILFLOORPE6	1,55	50	5	77,5	4
SILFLOORPE10	1,30	50	10	65	2




SEVERAL USES

The format and composition offer various uses in the construction field, also as under floor.

STABLE

The grid of polyethylene foam is durable and does not suffer from issues associated with chemical actions or incompatibility of materials.

PRODUCT STRATIGRAPHY COMPARISON

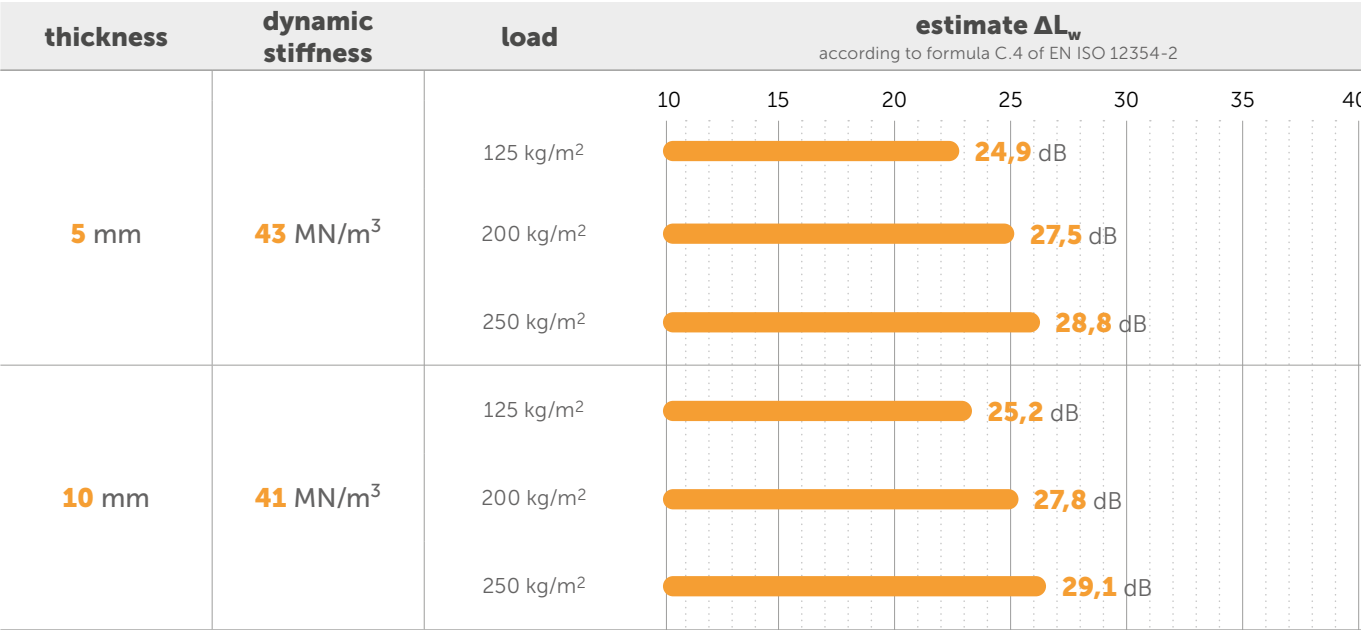

SILFLOORPE6

TECHNICAL DATA

Properties	standard	value
Thickness	-	5 mm
Surface mass m	-	0,15 kg/m ²
Apparent dynamic stiffness s' _t	EN 29052-1	43 MN/m ³
Dynamic stiffness s'	EN 29052-1	43 MN/m ³
Theoretical estimate of impact sound pressure level attenuation ΔL _w ⁽¹⁾	ISO 12354-2	24,9 dB
System resonance frequency f ₀ ⁽²⁾	ISO 12354-2	93,8 Hz
Impact sound pressure level attenuation ΔL _w ⁽³⁾	ISO 10140-3	19 dB
Thermal resistance R _t	-	0,13 m ² K/W
Water vapour transmission Sd	-	24,1 m
Water vapour resistance factor μ	EN 12086	5000
Density ρ	-	30 kg/m ³
Resistance to airflow r	ISO 9053	> 100,0 kPa·s·m ⁻²
Thermal conductivity λ	-	0,038 W/m·K
VOC emission classification	French decree no. 2011-321	A+

⁽¹⁾ ΔL_w = (13 lg(m')) - (14,2 lg(s')) + 20,8 [dB] with m' = 125 kg/m².

⁽²⁾ f₀ = 160 √(s'/m') with m' = 125 kg/m².

⁽³⁾ Measured in the laboratory on 200 mm CLT floor. See the manual for more information on configuration.

EN ISO 12354-2 ANNEX C | ESTIMATE ΔL_w [formula C.4] E ΔL [formula C.1]

The following tables show how the attenuation in dB (ΔL_w e ΔL) of SILFLOORPE6 varies as the load m' (i.e., the surface mass of the layers with which SILFLOORPE6 is loaded) changes.

SILFLOORPE6

s't or s'	43	43	43	43	43	43	43	43	43	43	43	[MN/m ³]
load m'	50	75	100	125	150	175	200	225	250	275	300	[kg/m ²]
ΔL _w	19,7	22,0	23,6	24,9	25,9	26,8	27,5	28,2	28,8	29,3	29,8	[dB]
f ₀	148,4	121,2	104,9	93,8	85,7	79,3	74,2	69,9	66,4	63,3	60,6	[Hz]

ΔL in frequency

[Hz]	100	-5,1	-2,5	-0,6	0,8	2,0	3,0	3,9	4,7	5,3	6,0	6,5	[dB]
[Hz]	125	-2,2	0,4	2,3	3,7	4,9	5,9	6,8	7,6	8,3	8,9	9,4	[dB]
[Hz]	160	1,0	3,6	5,5	7,0	8,1	9,1	10,0	10,8	11,5	12,1	12,7	[dB]
[Hz]	200	3,9	6,5	8,4	9,9	11,0	12,1	12,9	13,7	14,4	15,0	15,6	[dB]
[Hz]	250	6,8	9,4	11,3	12,8	14,0	15,0	15,8	16,6	17,3	17,9	18,5	[dB]
[Hz]	315	9,8	12,4	14,3	15,8	17,0	18,0	18,8	19,6	20,3	20,9	21,5	[dB]
[Hz]	400	12,9	15,6	17,4	18,9	20,1	21,1	22,0	22,7	23,4	24,0	24,6	[dB]
[Hz]	500	15,8	18,5	20,3	21,8	23,0	24,0	24,9	25,6	26,3	26,9	27,5	[dB]
[Hz]	630	18,8	21,5	23,4	24,8	26,0	27,0	27,9	28,6	29,3	29,9	30,5	[dB]
[Hz]	800	22,0	24,6	26,5	27,9	29,1	30,1	31,0	31,7	32,4	33,1	33,6	[dB]
[Hz]	1000	24,9	27,5	29,4	30,8	32,0	33,0	33,9	34,7	35,3	36,0	36,5	[dB]
[Hz]	1250	27,8	30,4	32,3	33,7	34,9	35,9	36,8	37,6	38,3	38,9	39,4	[dB]
[Hz]	1600	31,0	33,6	35,5	37,0	38,1	39,1	40,0	40,8	41,5	42,1	42,7	[dB]
[Hz]	2000	33,9	36,5	38,4	39,9	41,0	42,1	42,9	43,7	44,4	45,0	45,6	[dB]
[Hz]	2500	36,8	39,4	41,3	42,8	44,0	45,0	45,8	46,6	47,3	47,9	48,5	[dB]
[Hz]	3150	39,8	42,4	44,3	45,8	47,0	48,0	48,8	49,6	50,3	50,9	51,5	[dB]

EN ISO 12354-2 Allegato C - formula C.4

$$\Delta L_w = \left(13 \lg(m')\right) - \left(14,2 \lg(s')\right) + 20,8 \text{ dB}$$

EN ISO 12354-2 Allegato C - formula C.1


$$\Delta L = \left(30 \lg \frac{f}{f_0}\right) \text{ dB}$$

EN ISO 12354-2 Allegato C - formula C.2

$$f_0 = 160 \sqrt{\frac{s'}{m'}}$$

LABORATORY MEASUREMENT | CLT FLOOR 1

MEASUREMENT OF THE EVALUATION INDEX OF THE REDUCTION OF THE IMPACT SOUND PRESSURE LEVEL
REFERENCE STANDARD: ISO 10140-3 AND EN ISO 717-2

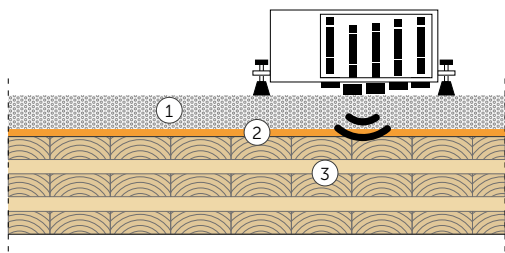


FLOOR SLAB

Surface = 13,71 m²
Surface mass = 214,2 kg/m²
Receiving room volume = 60,1 m³

- ① concrete screed (thickness: 50 mm); (2600 kg/m³); (130 kg/m²)
- ② SILENT FLOOR PE - SILFLOORPE5 (thickness: 5 mm); (30 kg/m³); (0,15 kg/m²)
- ③ CLT 5 layers (thickness: 200 mm); (420 kg/m³); (84 kg/m²)

IMPACT SOUND INSULATION

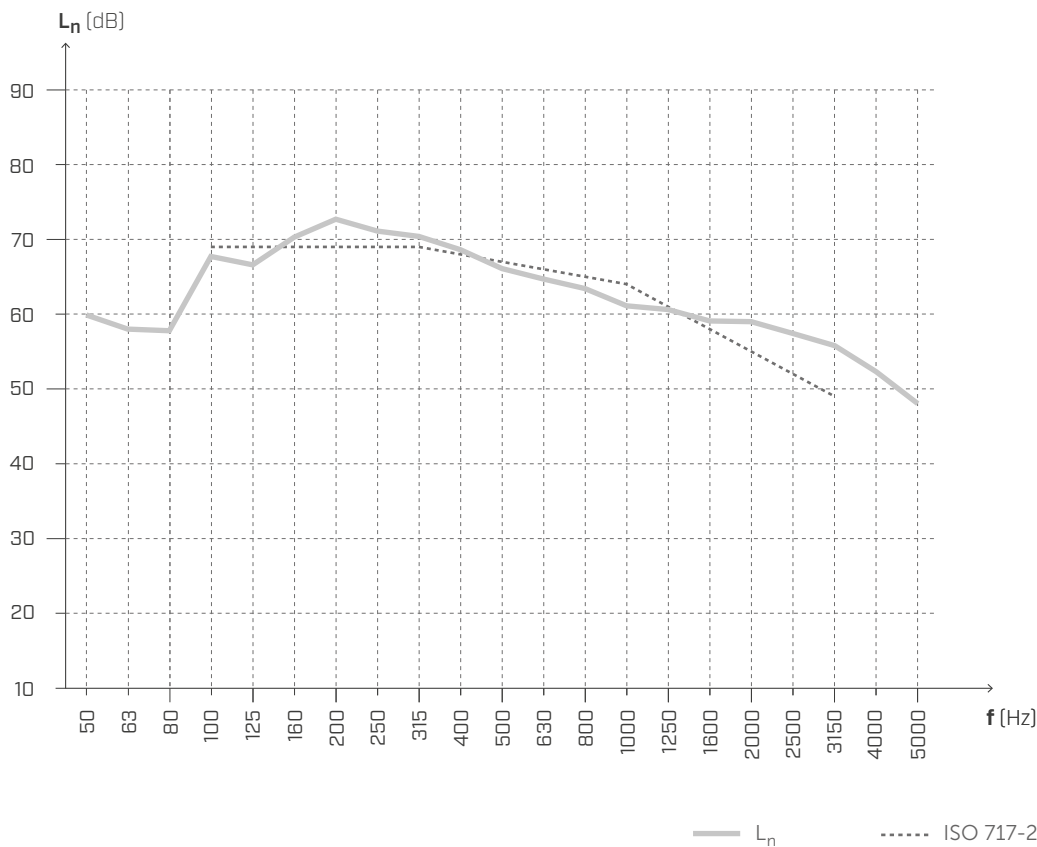

f	L _n
[Hz]	[dB]
50	59,9
63	58,0
80	57,8
100	67,7
125	66,6
160	70,3
200	72,7
250	71,1
315	70,4
400	68,6
500	66,1
630	64,7
800	63,4
1000	61,1
1250	60,6
1600	59,1
2000	59
2500	57,4
3150	55,8
4000	52,3
5000	48,0

$L_{n,w}(C_l) = 67 (-3) \text{ dB}$

$IIC = 43$

$\Delta L_{n,w} = -19 \text{ dB}^{(1)}$

$\Delta IIC = +19^{(2)}$

Testing laboratory: Building Physics Lab | Libera Università di Bolzano.
Test protocol: Pr. 2022-rothoLATE-L7.


NOTES:
(1) Decrease due to the addition of layers no. 1 and no. 2.
(2) Increase due to the addition of layers no. 1 and no. 2.

LABORATORY MEASUREMENT | CLT FLOOR 1

MEASUREMENT OF THE EVALUATION INDEX OF THE REDUCTION OF THE IMPACT SOUND PRESSURE LEVEL
RUBBER BALL METHOD | REFERENCE STANDARD: ISO 16283-2


FLOOR SLAB

Surface = 13,71 m²
Surface mass = 214,2 kg/m²
Receiving room volume = 60,1 m³

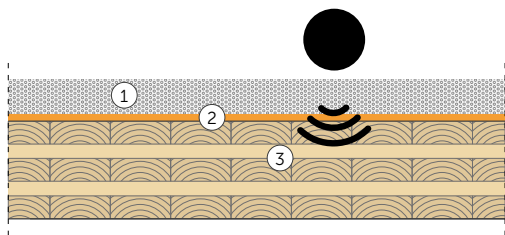

- ① concrete screed (thickness: 50 mm); (2600 kg/m³); (130 kg/m²)
- ② **SILENT FLOOR PE - SILFLOORPE5** (thickness: 5 mm); (30 kg/m³); (0,15 kg/m²)
- ③ CLT 5 layers (thickness: 200 mm); (420 kg/m³); (84 kg/m²)

IMPACT SOUND INSULATION

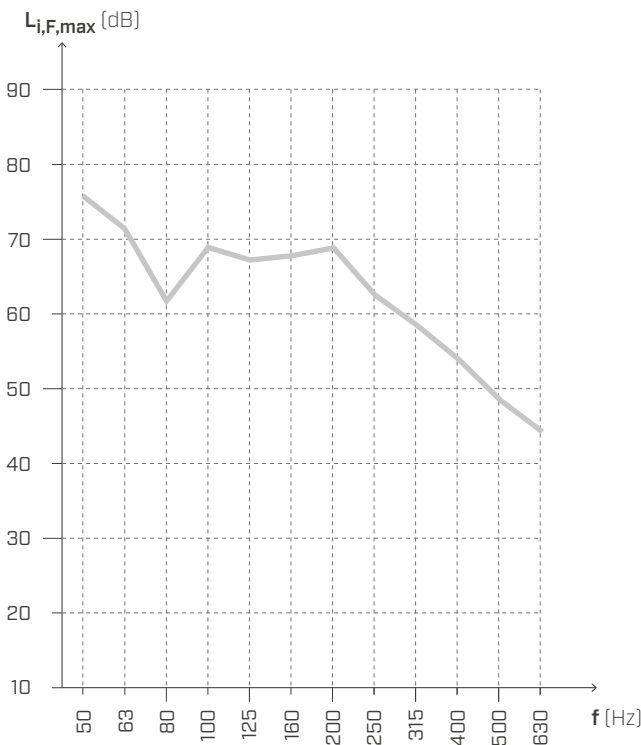

f	L _{i,F,max}
[Hz]	[dB]
50	75,8
63	71,4
80	61,7
100	68,9
125	67,2
160	67,8
200	68,9
250	62,5
315	58,5
400	53,9
500	48,5
630	44,3

— L_{i,F,max}

Testing laboratory: Building Physics Lab | Libera
Università di Bolzano.
Test protocol: Pr. 2022-rothoLATE-L7.

SILFLOORPE10

TECHNICAL DATA

Properties	standard	value
Thickness	-	10 mm
Surface mass m	-	0,30 kg/m ²
Apparent dynamic stiffness s' _t	EN 29052-1	41 MN/m ³
Dynamic stiffness s'	EN 29052-1	41 MN/m ³
Theoretical estimate of impact sound pressure level attenuation ΔL _w ⁽¹⁾	ISO 12354-2	25,2 dB
System resonance frequency f ₀ ⁽²⁾	ISO 12354-2	91,6 Hz
Impact sound pressure level attenuation ΔL _w ⁽³⁾	ISO 10140-3	-
Thermal resistance R _t	-	0,26 m ² K/W
Water vapour transmission Sd	-	48,2 m
Water vapour resistance factor μ	EN 12086	5000
Density ρ	-	30 kg/m ³
Resistance to airflow r	ISO 9053	> 100.0 kPa·s·m ⁻²
Thermal conductivity λ	-	0,038 W/m·K
VOC emission classification	French decree no. 2011-321	A+

⁽¹⁾ ΔL_w = (13 lg(m')) - (14,2 lg(s')) + 20,8 [dB] with m' = 125 kg/m².

⁽²⁾ f₀ = 160 √(s'/m') with m' = 125 kg/m².

⁽³⁾ Measured in the laboratory on 200 mm CLT floor. See the manual for more information on configuration.

EN ISO 12354-2 ANNEX C | ESTIMATE ΔL_w [formula C.4] E ΔL [formula C.1]

The following tables show how the attenuation in dB (ΔL_w e ΔL) of SILFLOORPE10 varies as the load m' (i.e., the surface mass of the layers with which SILFLOORPE10 is loaded) changes.

SILFLOORPE10

s't or s'	41	41	41	41	41	41	41	41	41	41	41	41	[MN/m ³]
load m'	50	75	100	125	150	175	200	225	250	275	300		[kg/m ²]
ΔL _w	20,0	22,3	23,9	25,2	26,2	27,1	27,8	28,5	29,1	29,6	30,1		[dB]
f ₀	144,9	118,3	102,4	91,6	83,7	77,4	72,4	68,3	64,8	61,8	59,1		[Hz]

ΔL in frequency

[Hz]	100	-4,8	-2,2	-0,3	1,1	2,3	3,3	4,2	5,0	5,7	6,3	6,8	[dB]
[Hz]	125	-1,9	0,7	2,6	4,0	5,2	6,2	7,1	7,9	8,6	9,2	9,7	[dB]
[Hz]	160	1,3	3,9	5,8	7,3	8,4	9,5	10,3	11,1	11,8	12,4	13,0	[dB]
[Hz]	200	4,2	6,8	8,7	10,2	11,4	12,4	13,2	14,0	14,7	15,3	15,9	[dB]
[Hz]	250	7,1	9,7	11,6	13,1	14,3	15,3	16,1	16,9	17,6	18,2	18,8	[dB]
[Hz]	315	10,1	12,8	14,6	16,1	17,3	18,3	19,1	19,9	20,6	21,2	21,8	[dB]
[Hz]	400	13,2	15,9	17,7	19,2	20,4	21,4	22,3	23,0	23,7	24,3	24,9	[dB]
[Hz]	500	16,1	18,8	20,7	22,1	23,3	24,3	25,2	25,9	26,6	27,2	27,8	[dB]
[Hz]	630	19,1	21,8	23,7	25,1	26,3	27,3	28,2	28,9	29,6	30,3	30,8	[dB]
[Hz]	800	22,3	24,9	26,8	28,2	29,4	30,4	31,3	32,1	32,7	33,4	33,9	[dB]
[Hz]	1000	25,2	27,8	29,7	31,1	32,3	33,3	34,2	35,0	35,7	36,3	36,8	[dB]
[Hz]	1250	28,1	30,7	32,6	34,0	35,2	36,2	37,1	37,9	38,6	39,2	39,7	[dB]
[Hz]	1600	31,3	33,9	35,8	37,3	38,4	39,5	40,3	41,1	41,8	42,4	43,0	[dB]
[Hz]	2000	34,2	36,8	38,7	40,2	41,4	42,4	43,2	44,0	44,7	45,3	45,9	[dB]
[Hz]	2500	37,1	39,7	41,6	43,1	44,3	45,3	46,1	46,9	47,6	48,2	48,8	[dB]
[Hz]	3150	40,1	42,8	44,6	46,1	47,3	48,3	49,1	49,9	50,6	51,2	51,8	[dB]

EN ISO 12354-2 Allegato C - formula C.4

$$\Delta L_w = \left(13 \lg(m') \right) - \left(14,2 \lg(s') \right) + 20,8 \text{ dB}$$

EN ISO 12354-2 Allegato C - formula C.1

$$\Delta L = \left(30 \lg \frac{f}{f_0} \right) \text{ dB}$$

EN ISO 12354-2 Allegato C - formula C.2

$$f_0 = 160 \sqrt{\frac{s'}{m'}}$$

Rotho Blaas Srl does not guarantee the legal and/or design conformity of data and calculations, as Rotho Blaas provides indicative tools such as technical-commercial service within the sales activity.

Rotho Blaas Srl follows a policy of continuous development of its products, thereby reserving the right to modify their characteristics, technical specifications and other documentation without notice.

The user or the designer are responsible to verify, at each use, the conformity of the data to the regulations in force and to the project. The ultimate responsibility for choosing the appropriate product for a specific application lies with the user/designer.

The values resulting from "experimental investigations" are based on the actual test results and valid only for the test conditions specified.

Rotho Blaas Srl does not guarantee and in no case can be held responsible for damages, losses and costs or other consequences, for any reason (warranty for defects, warranty for malfunction, product or legal responsibility, etc.) deriving from the use or inability to use the products for any purpose; from non-conforming use of the product;

Rotho Blaas Srl is not liable in any way for any errors in printing and/or typing. In the event of differences between the contents of the catalogue versions in the various languages, the Italian text is binding and takes precedence with respect to the translations.

Pictures are partially completed with accessories not included. Images are for illustration purposes only. Packaged quantities may vary.

This catalogue is private property of Rotho Blaas Srl and may not be copied, reproduced or published, totally or in part, without prior written consent. All violations will be prosecuted according to law.

The general purchase conditions of Rotho Blaas Srl are available on the website www.rothoblaas.com.

All rights reserved.

Copyright © 2022 by Rotho Blaas Srl

All renderings © Rotho Blaas Srl

Rotho Blaas Srl

Via dell'Adige N.2/1 | 39040, Cortaccia (BZ) | Italia
Tel: +39 0471 81 84 00 | Fax: +39 0471 81 84 84
info@rothoblaas.com | www.rothoblaas.com

