

PINCER MONO


ONE-HANDED CLAMP FOR TIGHTENING AND SEPARATION

- Applicable without tools, thanks to the smart mechanism allowing the upper part to be easily opened
- Tightening torque of up to 2000 N | 450 lbf



CODES AND DIMENSIONS

CODE	opening (a) [mm] [in]	distance (b) [mm] [in]	scrapping (c) [mm] [in]	profile (x) [mm] [in]	weight [kg] [lbs]	pcs
PIN8015	150 6	170 - 360 6 3/4 - 14 1/4	80 3 1/8	19 x 6 3/4 x 1/4	0,7 1.5	1
PIN8030	300 11 3/4	170 - 510 6 3/4 - 20 1/16	80 3 1/8	19 x 6 3/4 x 1/4	0,8 1.8	1
PIN8045	450 17 3/4	170 - 660 6 3/4 - 26	80 3 1/8	19 x 6 3/4 x 1/4	0,9 2.0	1
PIN8060	600 23 5/8	170 - 810 6 3/4 - 31 7/8	80 3 1/8	19 x 6 3/4 x 1/4	1,0 2.2	1
PIN8090	900 35 1/2	170 - 1110 6 3/4 - 43 11/16	80 3 1/8	19 x 6 3/4 x 1/4	1,3 2.9	1

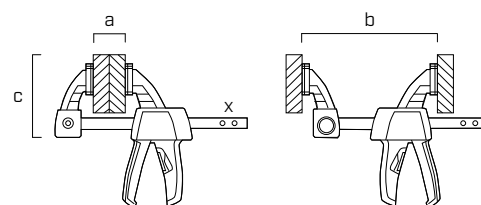

PINCER LEVER

LEVER CLAMP

- Allows you to work up to 5 times faster than with a traditional clamping
- Tightening torque of up to 7,5 kN | 1685 lbf



CODES AND DIMENSIONS

CODE	opening (a) [mm] [in]	scrapping (c) [mm] [in]	profile (x) [mm] [in]	weight [kg] [lbs]	pcs
PINLEV1430	300 11 3/4	140 5 1/2	25 x 12 1 x 1/2	2,2 4.8	1
PINLEV1260	600 23 5/8	120 4 3/4	25 x 12 1 x 1/2	2,8 4.8	1

