

REQUEST FORM

WINGSPAN

SINGLE AND H LIFTING BEAMS

CUSTOMER DETAILS

COMPANY NAME

CONTACT DETAILS

contact person



email



telephone



COMPANY ADDRESS

DELIVERY ADDRESS
(if different)

ROTHOBLAAS TECHNICAL
SALESMAN

CITY AND DATE

SIGNATURE

GENERAL INFORMATION

MATERIAL: high-strength steel structure with anti-rust protective coating and two coats of enamel.

COLOUR: RAL 2004 Pure orange.

EU Declaration of conformity, user and maintenance manual.

Each item is fitted with a SupraPlate NFC-RFID digital tag, allowing immediate access to up-to-date online documentation and easy management of traceability, checks and inspections.

LIFTING BEAMS

☐ SINGLE LIFTING BEAM



☐ H LIFTING BEAM

The H lifting beam with adjustable hooks allows dual adjustment of the lifting points, adapting to the size of the load. The structure consists of a main beam and two movable beams, which can be adjusted along the main beam.



LOAD CAPACITY

Requested load capacity: kg (max 15.000 kg)



DIMENSIONS

For single lifting beams:

L_{min} mm (1000 - 3000 mm)

L_{max} mm (2000 - 6000 mm)

L_{tot} mm (2100 - 6100 mm)

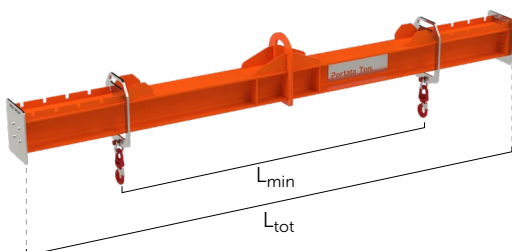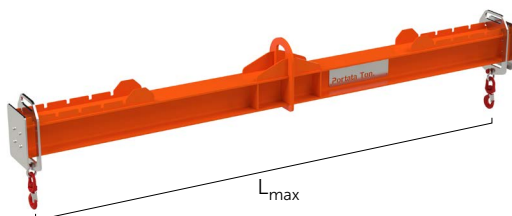



For H lifting beams:

A_{min} mm (1500 - 3000 mm)

A_{max} mm (3000 - 6000 mm)

B_{min} mm (900 - 1500 mm)

B_{max} mm (1500 - 3000 mm)

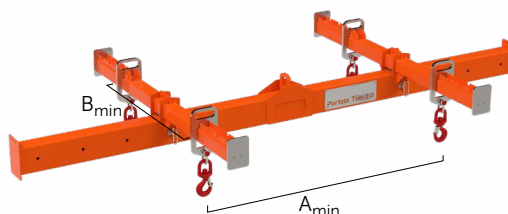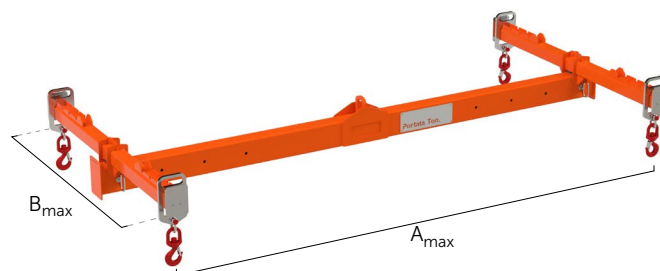

ACCESSORIES

TYPE OF HOOK



☐ Fixed hook



☐ Adjustable hook

TYPE OF CLOSURE



☐ Safety hook



☐ Self-locking hook

FORKLIFT ATTACHMENTS

Possibility for handling with forklift truck

☐ YES

☐ NO



OTHER