

VERTIGRIP ON WALL



VERTICAL LIFELINE ON WALL

PRACTICAL

The special-purpose supports allow installation on substructures in CLT, concrete or steel.

ADJUSTABLE

Possibility of adjusting the distance of the lifeline from the wall.

FUNCTIONAL

It can be installed on walls inclined at an angle of up to 15° from the vertical.

EN 353-1:2014 + A1:2017	RIU 11.119	AS/NZS 1891.3:2020
-------------------------------	------------	-----------------------



MAXIMUM NUMBER
OF USERS



BIM



VIDEO





MANUALS



■ TECHNICAL DATA*

■ VERTICAL LIFELINE COMPONENTS

substructure	minimum thickness	fasteners
 CLT	100 mm	VGS Ø11 
 C20/25	140 mm	AB1 Ø12 AB1A4 
		SKR Ø12 
		rod Ø12 
		VIN-FIX HYB-FIX 
 S235JR	6 mm	EKS + ULS + MUT 

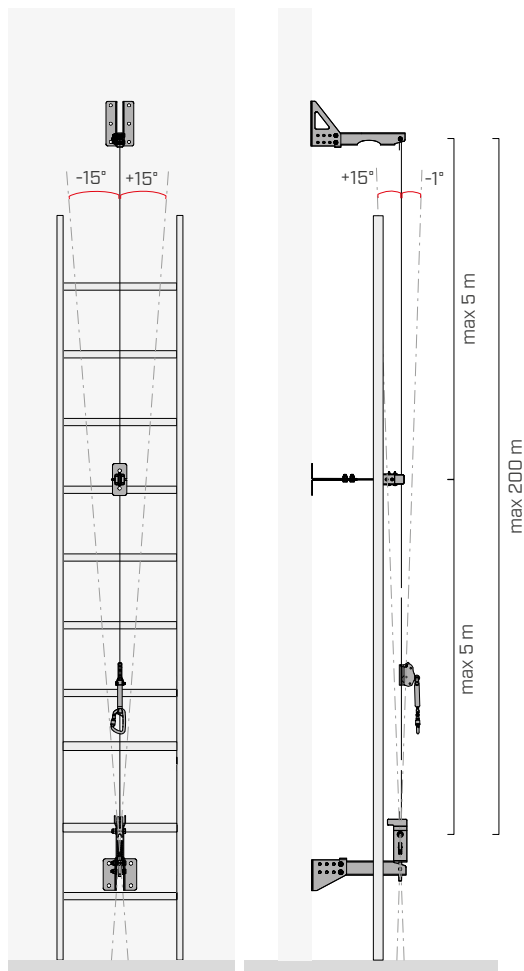

* The values indicated are derived from experimental tests carried out under the supervision of third party organisations according to the referenced standard. For a calculation report with minimum distances, according to the referenced normative requirements, the substructure must be verified by a qualified engineer before installation.

A4
AISI 316

NOTE:

For versions in A4, see the page on components (see page 90).