

LOOP

ANCHOR POINT FOR TIMBER AND CONCRETE SUBSTRUCTURE

LOW PROFILE



Under-tile fastening ensures a low visual impact, ideal for installation on roofs in historic centres.

FAST

Fast and easy installation, with just two HBS Ø8 screws.

ADAPTABLE

Thanks to its KRAKEN support, it can also be installed on thin concrete roofs.

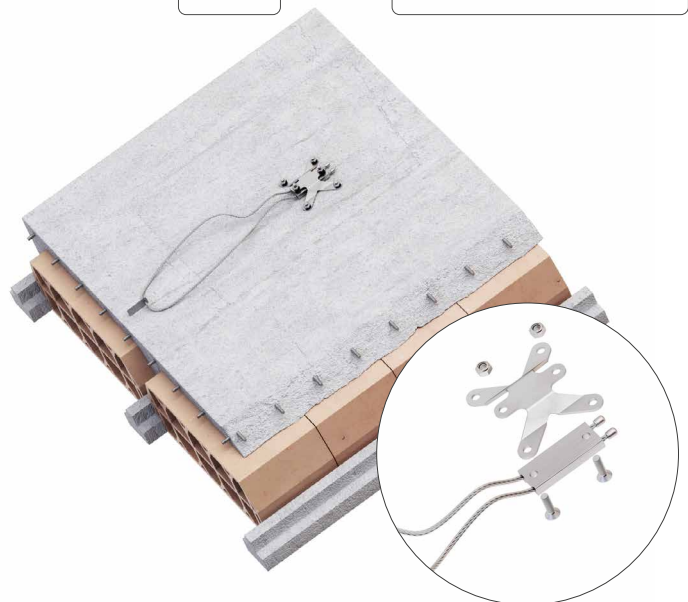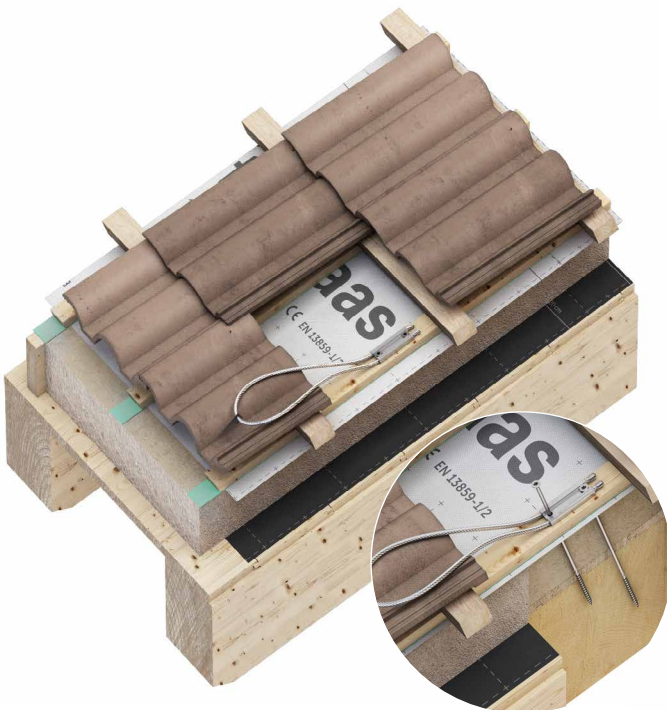

EN 795:2012 A
UNI 11578:2015 A



MAXIMUM NUMBER OF USERS



LOAD DIRECTION



TYPES OF APPLICATION



TECHNICAL DATA*

substructure	minimum thickness	fasteners
GL24h	100 x 100 mm	HBS Ø8

* The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standards referred to. For a correct calculation report with minimum distances according to the standard requirements, the substructure must be checked by a qualified engineer before installation.

substructure	minimum thickness	fastening + KRAKEN
C20/25	100 mm	M8 5.8 rod + ULS + MUT VIN-FIX HYB-FIX

CODES AND DIMENSIONS

CODE	material		B [mm] [in]	H [mm] [in]	L [mm] [in]	pcs	
LOOP	AISI 316 stainless steel grade 1.4401 / EN AW 6060 T6	A4 AISI 316	-	12 1/2	456 17 15/16	1	
LOOPXL	AISI 316 stainless steel grade 1.4401 / EN AW 6060 T6	A4 AISI 316	-	12 1/2	756 29 3/4	1	
KRAKEN	AISI 430 stainless steel grade 1.4016 IIA	430 AISI	100 4	18 11/16	116 4 9/16	1	

CODE	description	page	CODE	description	page
MULTIPLATE	universal counterplate	253	MULTIBEF	fastening set for MULTIPLATE	254
OMEGA	accessory for MULTIPLATE	253			