

I OVERNET

PERMANENT FALL PROTECTION SYSTEM FOR INDUSTRIAL ROOFING

SIMPLE




Supplied in 25-m rolls, it is easily installed outdoors on trapezoidal metal sheet or trapezoidal sandwich panels.

COMPLETE

Complete system composed of: fall protection net, fastening plates, EPDM gaskets and rivets.

STRONG

Strong and durable through the combination of different protective elements: zinc plating, primer and PVC.

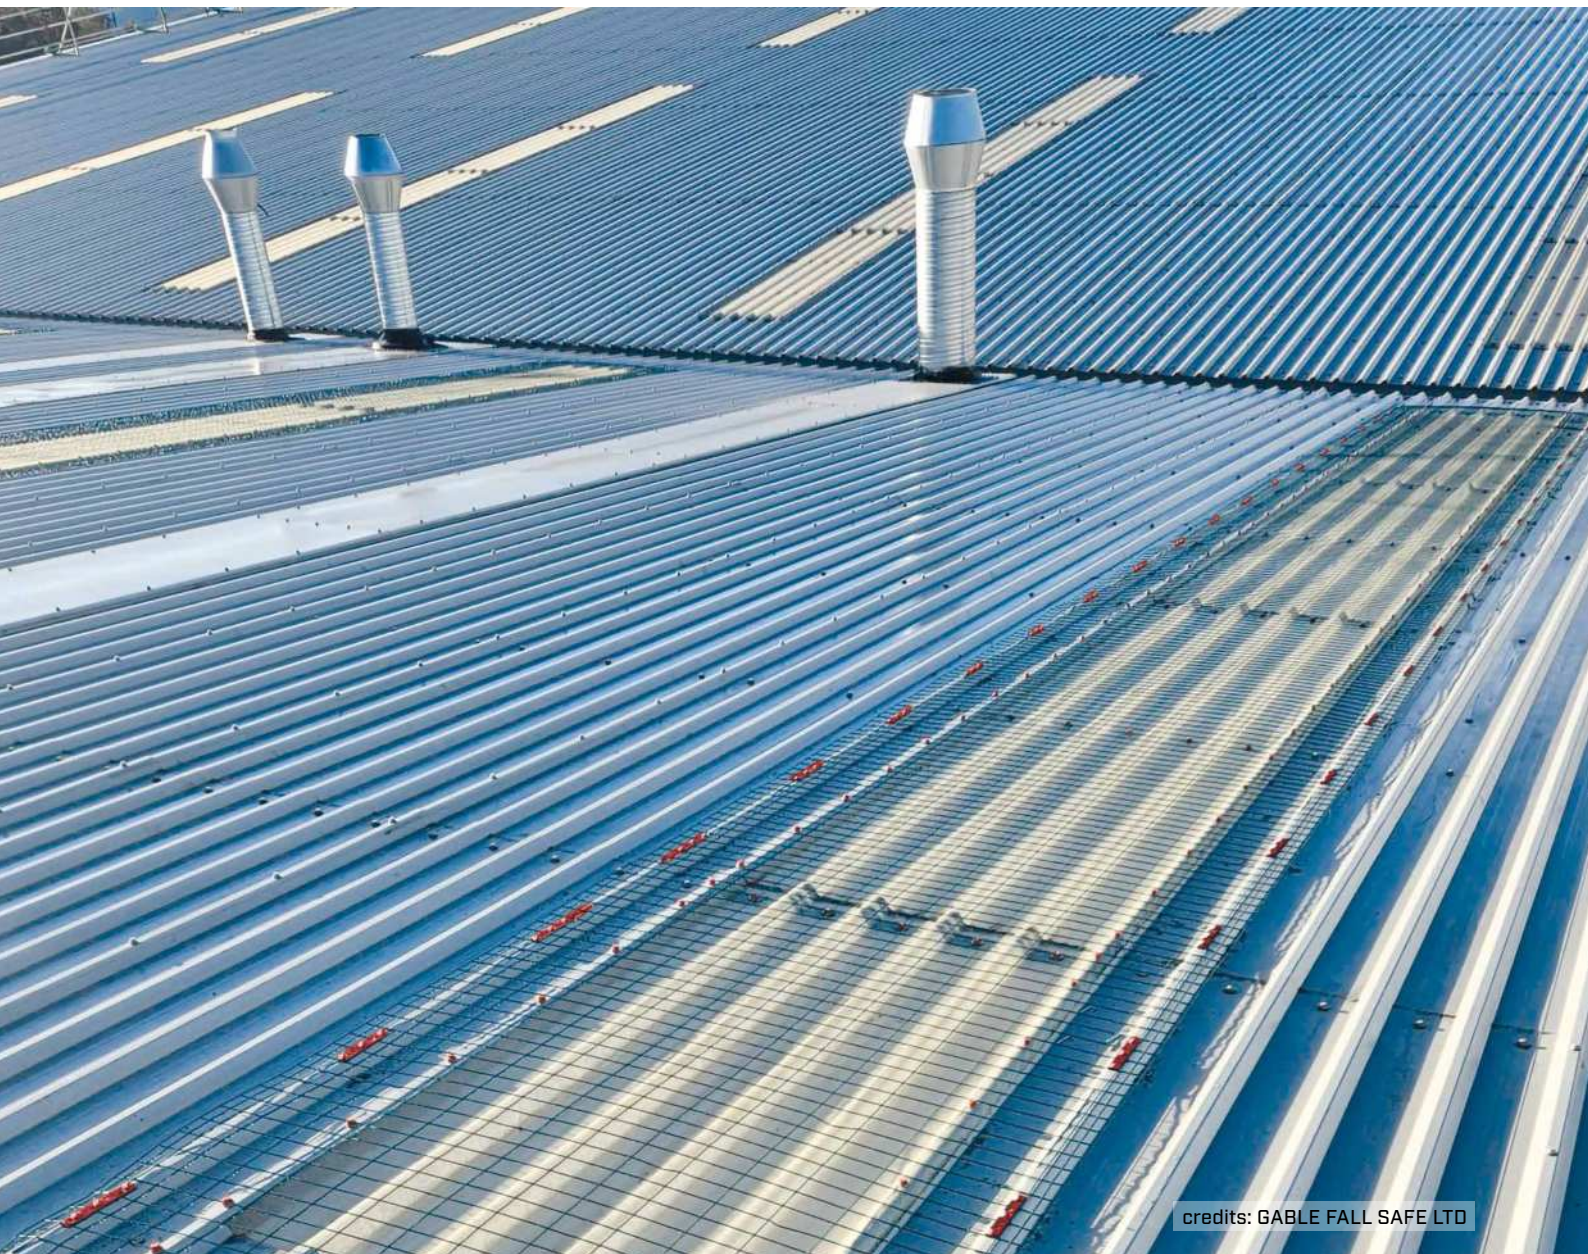


credits: GABLE FALL SAFE LTD

■ INSTALLATION

INSTALLATION DIAGRAMS


PARALLEL FRETS

Installation scheme D

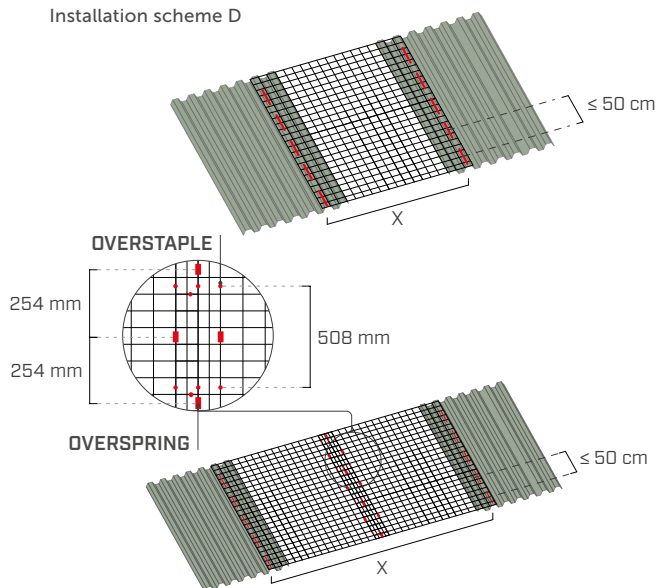

PERPENDICULAR FRETS

Installation scheme E

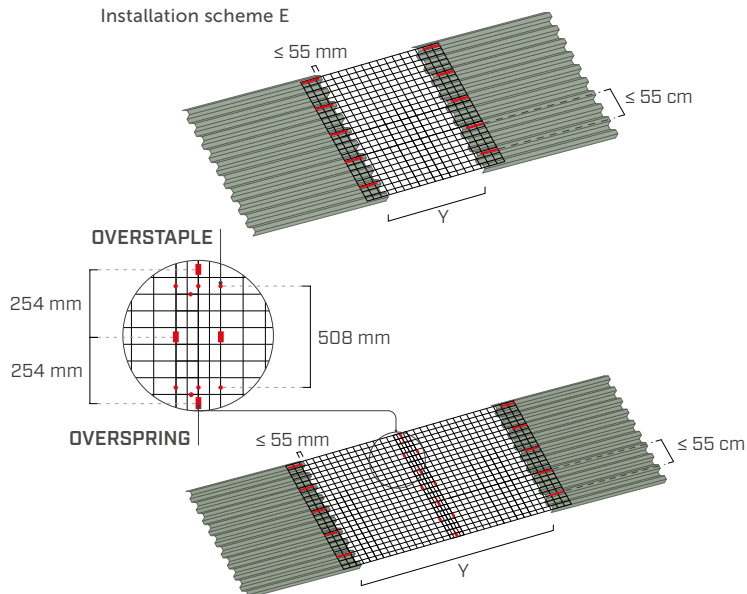




CODE	SINGLE NET		JOINTED NET	
	parallel frets width between last useful frets (X) [mm]	perpendicular frets skylight opening (Y) [mm]	parallel frets width between last useful frets (X) [mm]	perpendicular frets skylight opening (Y) [mm]
OVERNET1020B	≤ 880	≤ 690	-	1500-1610
OVERNET1220B	890-1070	700-890	1600-1780	1620-2010
OVERNET1520B	1080-1390	900-1200	1790-2190	2020-2620
OVERNET1830B	1400-1690	1210-1500	2200-2790	2630-3230
OVERNET2030B	1700-1890	1510-1700	2800-3410	3240-3630
OVERNET2230B	1890 - 2080	1710-1910	3820-4220	3640-4040
OVERNET2440B	2090 - 2300	1920-2110	4260-4630	4050-4450

To make the system certifiable and obtain more detailed information on the various product installations, it is essential to follow the installation instructions outlined in the relevant Technical Approval No. 650 issued by the National Research Council – Construction Technologies Institute (ITC-CNR).

■ CODES AND DIMENSIONS

CODE	description	colour	B		L		pcs
			[mm]	[in]	[m]	[ft]	
OVERNET1020B	black PVC-coated fall protection safety net	 (black)	1020	40 3/16	25	82 1/4	1
OVERNET1220B			1220	48 1/16	25	82 1/4	1
OVERNET1520B			1520	59 13/16	25	82 1/4	1
OVERNET1830B			1830	72 1/16	25	82 1/4	1
OVERNET2030B			2030	79 15/16	25	82 1/4	1
OVERNET2230B			2230	87 13/16	25	82 1/4	1
OVERNET2440B			2440	96	25	82 1/4	1

COMPLEMENTARY PRODUCTS

CODE	description	colour	pcs
OVERNETBRAR	red fastening plate for OVERNET (19 x 142 x 2 mm)		100 
OVERSPRING	joining spring for net Ø28x37,5 mm		450
OVERSTAPLE	joining staples for nets 20 mm		1000 
OVERNETEPDM	EPDM gasket for OVERNET (19 x 142 x 4 mm)	-	100 
RIV7728	rivet with EPDM washer Ø7,7x28 mm	-	300 
WREN	pliers with dispenser for OVERSTAPLE joining staples	-	1